



杭州科德磁业有限公司

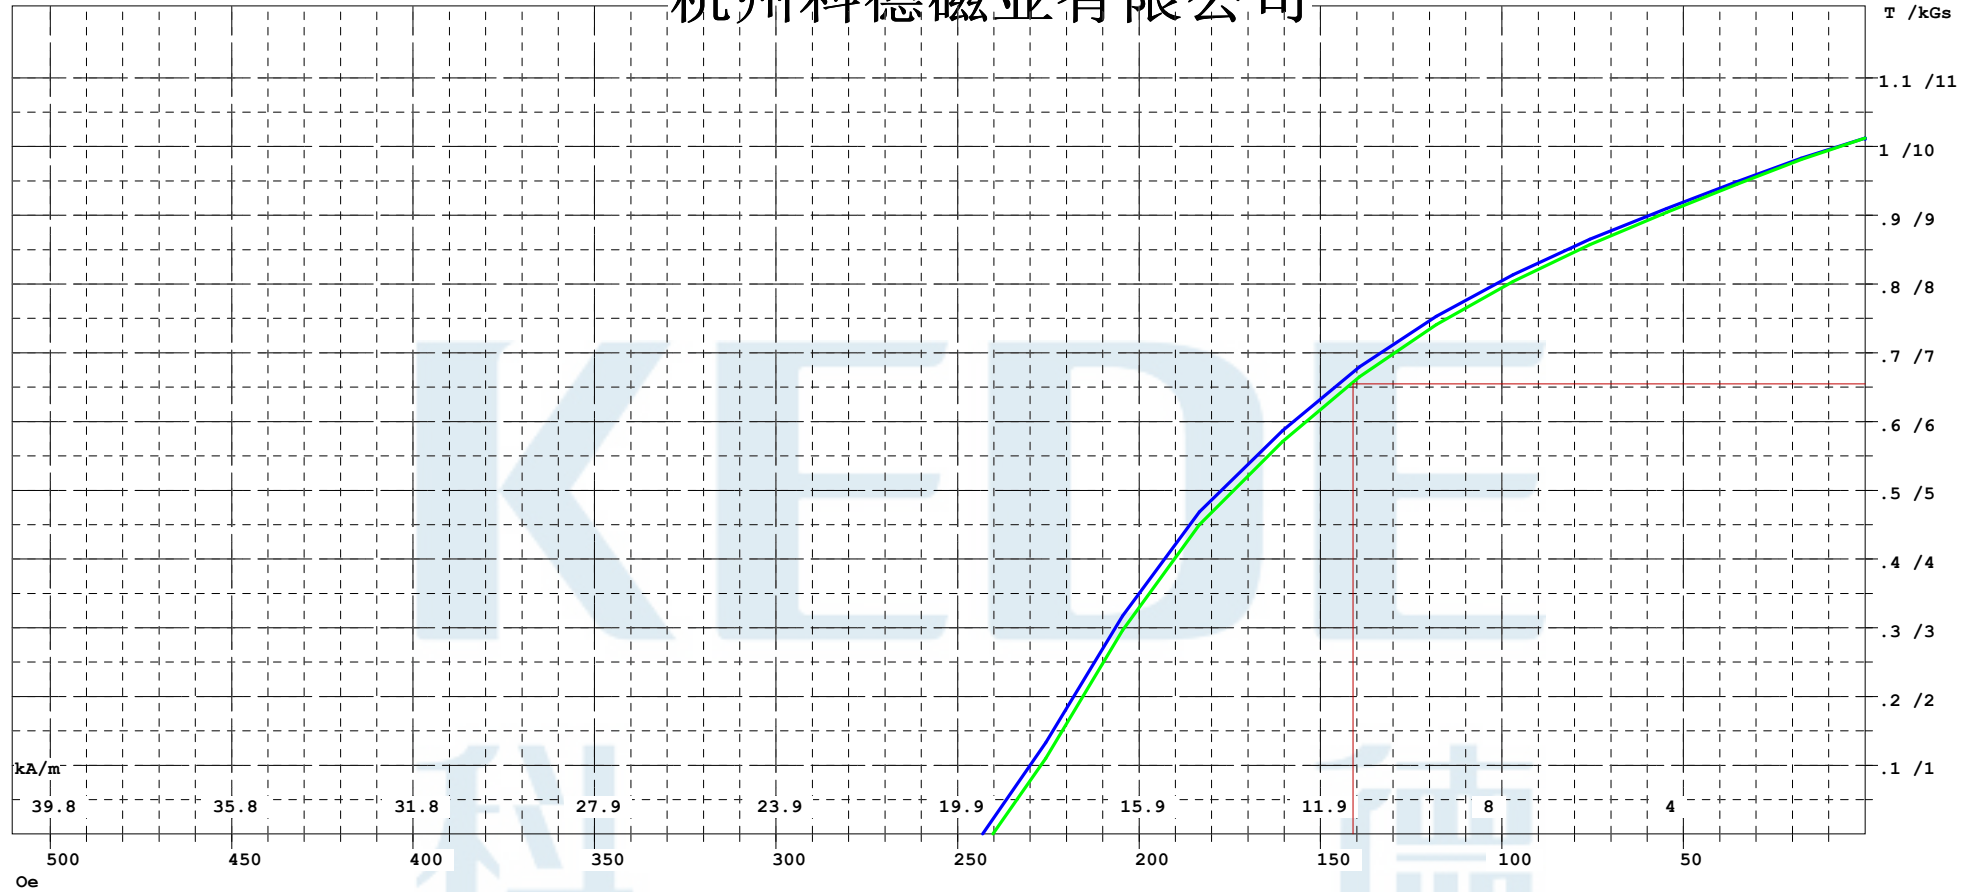

Br	= 1.015	T	10.145 kGs
Hcb	= 19.1	kA/m	0.240 kOe
Hcj	= 19.3	kA/m	0.243 kOe
(BH) max	= 7.46	kJ/m³	0.94 MGOe
Hk	= 4.5	kA/m	0.056 kOe
Hd	= 11.2	kA/m	0.141 kOe
Bd	= 0.655	T	6.55 kGs
Hk/Hcj	= 23.0%		

Material Type: FeCoW	
Patch No:	2018
Sample No:	1
Test Date:	2018
Sample Shape:	Ring
Size (mm):	D=58.90 d=36.80
Document No:	
SampleT(°C):	20

杭州科德磁业有限公司

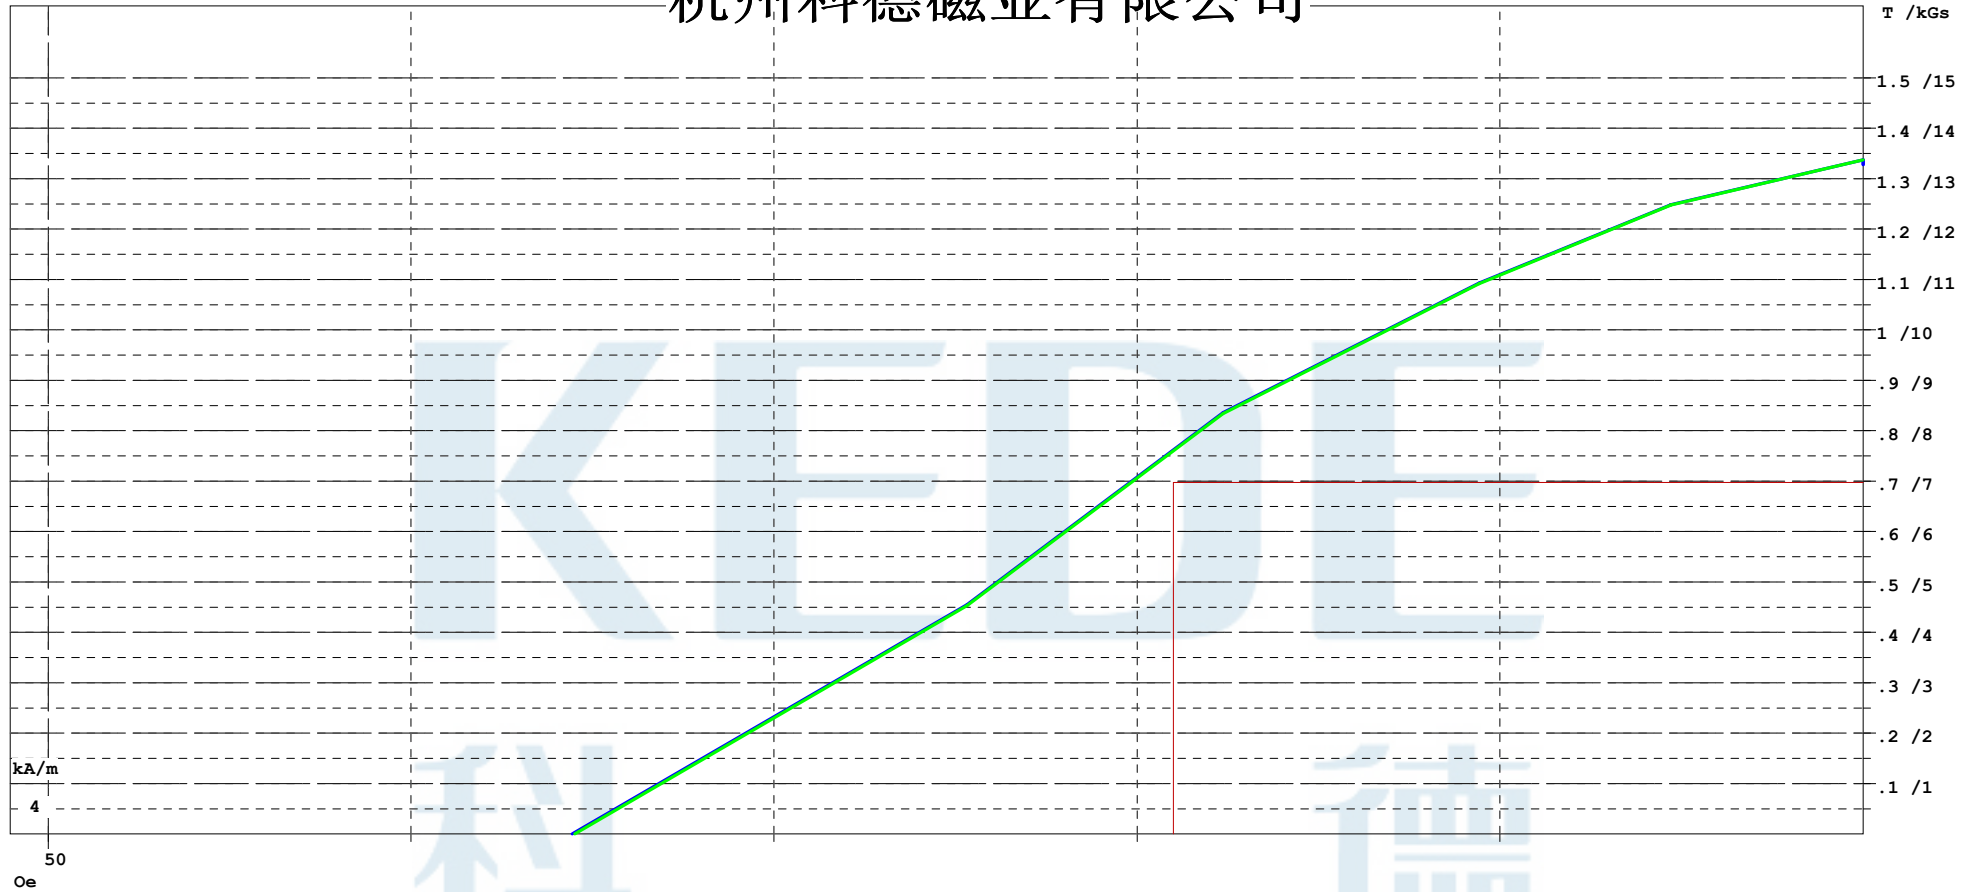

Br	= 1.363	T	13.633 kGs
Hcb	= 2.8	kA/m	0.035 kOe
Hcj	= 2.8	kA/m	0.036 kOe
(BH) max	= 2.3	kJ/m³	0.287 MGOe
Hk	= 0.6	kA/m	0.008 kOe
Hd	= 1.5	kA/m	0.019 kOe
Bd	= 0.698	T	6.98 kGs
Hk/Hcj	= 22.5%		

Material Type:	FeNiCo
Patch No:	2018
Sample No:	1
Test Date:	2018
Sample Shape:	Column
Size (mm):	5.50
Document No:	
SampleT (°C):	20